

AnaCom's Baby Block Up-Converters (Baby BUCs) provide the small mounting size, high output power, and high reliability needed by most mobile and fly-away antennas, even in situations involving extreme temperatures and high vibrations. Baby BUCs are designed for continuous outdoor duty in all types of harsh environments. Ideally suited for SCPC, MCPC, DAMA, TDMA, and VoIP applications and designed to interface with any L-band modem, the Baby BUC may be used in a wide variety of communication networks.

AnaCom's Baby BUC now features web-based and command-line access to Monitor and Control functions accessible via Ethernet, FSK, Telnet, RS-232- and RS-485, and device monitoring over SNMP.

Features

- ✓ Built in test capabilities for improved maintainability and reduced dependence on external test equipment
- ✓ No indoor RF equipment is needed
- ✓ Superior phase noise
- ✓ Flexible, universal DC power supply (AC optional)

Built In Test Capability

To improve and simplify maintenance routines, an external terminal (or computer) can be connected to monitor a number of critical parameters without use of additional test equipment. These include:

- ✓ Transmitter power output level
- ✓ TX IF level
- ✓ Power supply voltages
- ✓ TX synthesizer loop voltages
- ✓ Internal Temperature
- ✓ Alarm Details

Controllable functions from the terminal include:

- ✓ TX On/Off
- ✓ TX Gain

Benefits

- ✓ "Last Touch" controls allow for remote configuration or local (*manual*) configuration
- ✓ Flash memory means that the BUC always powers up with exactly the same operating conditions as when it lost power (*or was shut down*)
- ✓ Comprehensive maintenance features for operational effectiveness and minimum outages.
- ✓ Simple installation.

Comprehensive Monitor & Control

The Baby BUC's Monitor & Control feature allows you to monitor and control the BUC on the same M&C bus with most indoor equipment such as modems and multiplexers. The Monitor & Control system can be used in combination with the unit's internal metering function to monitor operational parameters.

The M&C can be accessed remotely via-

Serial protocols:


- ✓ RS-232
- ✓ RS-485
- ✓ FSK
- ✓ Supervisor 9

Ethernet protocols:

- ✓ HTTP
- ✓ Telnet
- ✓ SNMP
- ✓ Supervisor 9

Compact, Functional Design

The upconverter, power amplifier, monitor and control and power supply are included in a single enclosure. The only cabling required to the indoor equipment are IF and power. An optional ovenized, high stability crystal oscillator can be used to lock the TX synthesizer. Additional temperature and aging compensation are provided by an onboard microprocessor.

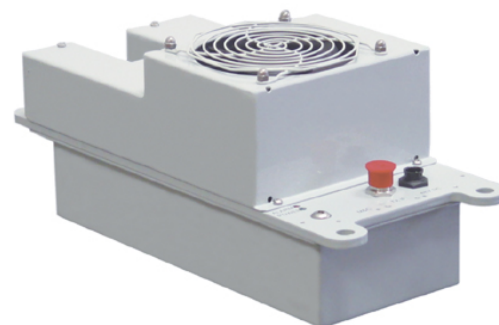

Baby BUC

Ku-Band series

SPECIFICATIONS

		8W	16W	25W	32W	40W	50W	60W	80W	100W	
TRANSMIT CHARACTERISTICS	1 dB COMPRESSION POINT (dBm)	39	42	44	45	46	47	47.8	49	50	
	TX GAIN (Nominal)	64	67	69	70	71	72	72.8	74	75	
	TX GAIN RANGE	±10 dB variable in 1 dB steps via M&C									
	TX LEVEL FLATNESS	4 dBp-p max / 500 MHz									
	TX GAIN OVER TEMPERATURE	± 1dB max									
	TX INPUT IF FREQUENCY	Ku = 950 to 1450 MHz			EKu = 950 to 1450 MHz			SEKu = 950 to 1,700 MHz			
	TX INPUT IF IMPEDANCE	50 ohms (75 ohms optional)									
	TX INPUT IF LEVEL	-25 dBm for rated output with nominal gain									
	TX L.O. FREQUENCY	Ku = 13.050 GHz			EKu = 12.800 GHz			SEKu = 12.800 GHz			
	TX OUTPUT FREQUENCY	Ku = 14.0 to 14.50 GHz			EKu = 13.75 to 14.25 GHz			SEKu = 13.75 to 14.50 GHz			
TX PHASE NOISE	-60 dBc/Hz max @ 100Hz			-70 dBc/Hz max @ 1KHz			-80 dBc/Hz max @ 10KHz				
	-90 dBc/Hz max @ 100KHz			-100 dBc/Hz max @ 1MHz							
INTERMOD	-32 dBc max (2 carriers, each 9dB backoff from P1dB rating)										
SPURIOUS	-55 dBc max out of band										
REFERENCE	Requirements	Provided on TXIF line by L-band modem									
	FREQUENCY	10 MHz (sine-wave)									
	INPUT POWER	-5 to +5 dBm (at input port)									
	PHASE NOISE	-125 dBc/Hz max @ 100Hz -135 dBc/Hz max @ 1KHz -140 dBc/Hz max @ 10KHz									
	INTERNAL REFERENCE OPTION	10 ⁻⁸ over rated temperature									
SYSTEM	ALARM RELAYS	FORM C for Summary Alarm; Isolated									
	POWER	100 to 250 VAC; 47 to 63 Hz				optional 48V DC					
	M&C	SNMP, HTTP, Telnet			Ethernet, RS-232, RS-485, FSK						
ENVIRONMENTAL	TEMPERATURE	-50 to +55°C operational -50 to +75°C storage									
	HUMIDITY	95% at 45C									
	ALTITUDE	6,500 meters (21,500 ft) max									
	RAIN	20 inches per hour									
	WIND	150 miles per hour									
	VIBRATION	1.0 g random operational, 2.5 g random survival									
SHOCK	10 g operational, 40 g survival										
POWER & DIMENSIONS	TYPICAL POWER CONSUMPTION (VA)	111	189	256	266	372	392	850	935	950	
	PRIME POWER RECOMMENDATION	220	380	500	532	750	784	1700	1870	1900	
	WEIGHT: 48V DC	14 lbs. (6 kg)	15 lbs. (7 kg)	15.5 lbs. (7 kg)		17.5 lbs. (8 kg)		61 lbs. (28 kg)	67 lbs. (30 kg)		
	110/220V AC	16.4 lbs. (7 kg)	17.4 lbs. (8 kg)	17.9 lbs. (8 kg)		19.9 lbs. (9 kg)		64 lbs. (29 kg)	72 lbs. (33 kg)		
BUC SIZE: 48V DC	13.3" x 6.3" x 7.4"				13.3" x 6.3" x 8.4"		21.6" x 12.93"	21.6" x 12.93" x 13.53"			
110/220V AC	13.3" x 6.3" x 8.4"				13.3" x 6.3" x 9.4"		x 11.2"				

*all specifications subject to change

7/19/10

3888114



Phone: +1 408-519-2062 FAX: +1 408-519-2063
<http://www.anacominc.com>